



# FULLY LOUVRED DOOR

Fully **CE** compliant.

Tested to EN14351-1 product compliant standard




## DOOR LEAF

<i>Thickness:</i>	48mm
<i>Material:</i>	2mm corrosion resistant Zintec/Aluzinc as standard, wide variety of colours and finishes available. Also Stainless Steel.
<i>Construction:</i>	Doorblade manufactured from 2mm steel. The louvre blades are inclined at 45° and mounted at 50mm centres within a 50mm deep angle frame, which is mounted on a box section sub-frame for rigidity. A galvanised bird & vermin mesh can be supplied.


## DOOR FRAME

<i>Construction:</i>	Folded from 1.6mm Zintec/Aluzinc. Screw and tab construction with 4no. adjustable fixing feet per jamb, variable sub-frame supplied as standard to accommodate site tolerance of -0/+30mm. The frame is fitted with 3no. Class 13 stainless steel hinges with 2no. security dog bolts.
<i>Profile:</i>	

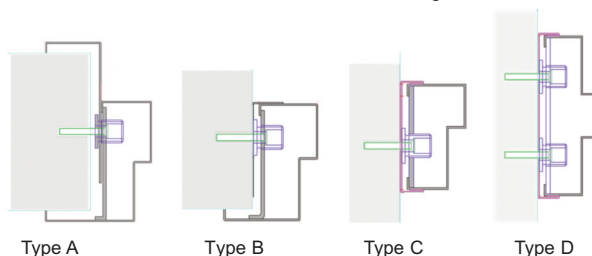

## THRESHOLD

<i>Standard:</i>	15mm rebated threshold.
<i>Optional:</i>	5mm driveable (DDA compliant). 12.5mm 564A Aluminium (DDA compliant).

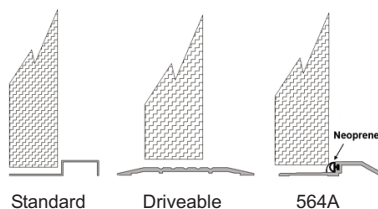

## FINISHES

<i>Standard:</i>	Polyester Powder coated from Standard Colour Range.
<i>Optional:</i>	Polyester Powder Coating from non-standard colour range. PVC laminate from standard range. Woodgrain PVC laminate. Stainless steel, brushed, polished or patterned. Unfinished for site finishing.

## SIZES


<i>Size:</i>	Doors are custom manufactured in 10mm increments for single openings 690mm to 1100mm and double openings 1290mm to 2300mm, at heights up to 2500mm. Over these sizes fully louvred performance can be achieved by custom design. Contact <a href="mailto:sales@industrial-door-eng.co.uk">sales@industrial-door-eng.co.uk</a> for special configurations and finishes.
--------------	--





## PANEL ARRANGEMENTS

- Construction:** Side and over panels can be supplied.
- Sizes:** Side panels are available up to 1100mm wide x 2500mm high.  
Over panels are available up to 2500mm (single door) or 2200mm (double door).
- Options:** Hinged or removeable panels are available. Also combinations to create enclosures.  
Please contact [sales@industrial-door-eng.co.uk](mailto:sales@industrial-door-eng.co.uk) with specific requirements.

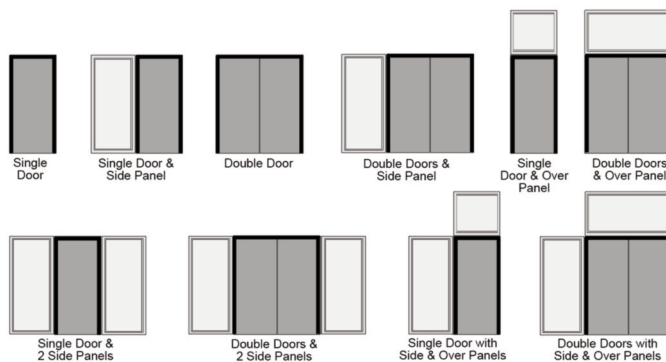

INDUSTRIAL DOOR ENGINEERING LTD, Winnington Avenue, Northwich, Cheshire, CW8 4EQ  
Tel: +44 (0)1606 563045 • Fax: +44 (0)1606 871482 • Email: [sales@industrial-door-eng.co.uk](mailto:sales@industrial-door-eng.co.uk)

Individual specifications may vary as IDE conduct a policy of continuous product development.

